




ねじ込み形レジューサー

THREADED REDUCERS

SRC

(CON. REDUCERS)

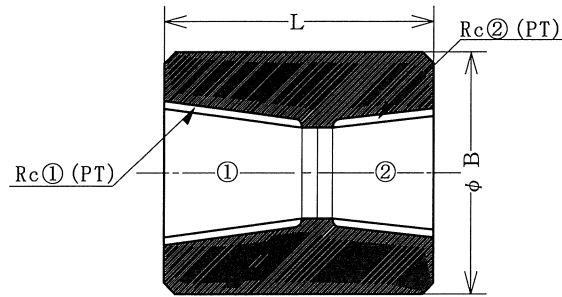

S R C

UNIT : mm

NOM. SIZE		Sch 80					
(A)		(B)		Rc① (PT)	Rc② (PT)	B	L
①	②	①	②				
08 × 06		1/4 × 1/8		1/4	1/8	22.0	25.0
10 × 06		3/8 × 1/8		3/8	1/8	28.0	28.0
10 × 08		3/8 × 1/4		3/8	1/4	28.0	28.0
15 × 06		1/2 × 1/8		1/2	1/8	32.0	32.0
15 × 08		1/2 × 1/4		1/2	1/4	32.0	32.0
15 × 10		1/2 × 3/8		1/2	3/8	32.0	32.0
20 × 08		3/4 × 1/4		3/4	1/4	38.0	38.0
20 × 10		3/4 × 3/8		3/4	3/8	38.0	38.0
20 × 15		3/4 × 1/2		3/4	1/2	38.0	38.0
25 × 08		1 × 1/4		1	1/4	46.0	45.0
25 × 10		1 × 3/8		1	3/8	46.0	45.0
25 × 15		1 × 1/2		1	1/2	46.0	45.0
25 × 20		1 × 3/4		1	3/4	46.0	45.0
32 × 15		1-1/4 × 1/2		1-1/4	1/2	58.0	50.0
32 × 20		1-1/4 × 3/4		1-1/4	3/4	58.0	50.0
32 × 25		1-1/4 × 1		1-1/4	1	58.0	50.0
40 × 15		1-1/2 × 1/2		1-1/2	1/2	63.0	55.0
40 × 20		1-1/2 × 3/4		1-1/2	3/4	63.0	55.0
40 × 25		1-1/2 × 1		1-1/2	1	63.0	55.0
40 × 32		1-1/2 × 1-1/4		1-1/2	1-1/4	63.0	55.0
50 × 15		2 × 1/2		2	1/2	76.0	60.0
50 × 20		2 × 3/4		2	3/4	76.0	60.0
50 × 25		2 × 1		2	1	76.0	60.0
50 × 32		2 × 1-1/4		2	1-1/4	76.0	60.0
50 × 40		2 × 1-1/2		2	1-1/2	76.0	60.0

ヤマト特殊鋼株式会社

YAMATO SPECIAL STEEL CO., LTD.

Sheet No. J T - 6

平成22年1月5更新