




さし込み溶接形レジュューサー  
 SOCKET-WELDING REDUCERS

**SWRC**  
 (CON. REDUCERS)

JIS B2316

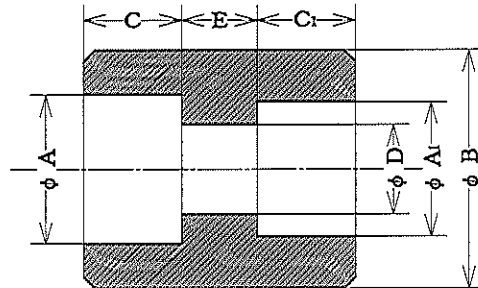

SW RC

UNIT : mm

NOM. SIZE		Sch 80						
(A)	(B)	B	A	A <sub>1</sub>	D	E	C	C <sub>1</sub>
① ②	① ②							
8 × 6	1/4 × 1/8	22.0	14.3	11.0	7.1	6.4	12.0	12.0
10 × 8	3/8 × 1/4	28.0	17.8	14.3	9.4	6.4	13.0	13.0
15 × 08	1/2 × 1/4	32.0	22.2	14.3	9.4	9.5	13.0	13.0
15 × 10	1/2 × 3/8	32.0	22.2	17.8	12.7	9.5	13.0	13.0
20 × 10	3/4 × 3/8	38.0	27.7	17.8	12.7	9.5	16.0	16.0
20 × 15	3/4 × 1/2	38.0	27.7	22.2	16.1	9.5	16.0	16.0
25 × 15	1 × 1/2	46.0	34.5	22.2	16.1	12.7	17.0	17.0
25 × 20	1 × 3/4	46.0	34.5	27.7	21.4	12.7	17.0	17.0
32 × 20	1-1/4 × 3/4	58.0	43.2	27.7	21.4	12.7	18.0	18.0
32 × 25	1-1/4 × 1	58.0	43.2	34.5	27.2	12.7	18.0	18.0
40 × 25	1-1/2 × 1	63.0	49.1	34.5	27.2	12.7	20.0	20.0
40 × 32	1-1/2 × 1-1/4	63.0	49.1	43.2	35.5	12.7	20.0	20.0
50 × 32	2 × 1-1/4	76.0	61.1	43.2	35.5	19.1	23.0	23.0
50 × 40	2 × 1-1/2	76.0	61.1	49.1	41.2	19.1	23.0	23.0

特記：異径カップリング(レジュューサー)-Eは大径側に等しく、  
 Dは小径側、A、C、は各々のサイズに対応する。

REMARK: RED. COUPLING (REDUCER) - E IS EQUAL TO LARGER SIZE,  
 D IS EQUAL TO SMALLER SIZE AND A, C, IS CORRESPONDING  
 TO EACH IN PRINCIPLE.

**ヤマト特殊鋼株式会社**  
 YAMATO SPECIAL STEEL CO., LTD.

Sheet No. JW-8

平成22年1月5更新