




さし込み溶接形レギュレーター
SOCKET-WELDING REDUCERS

SWRC
(CON. REDUCERS)

JIS B2316

ステンレス用
FOR STAINLESS STEEL

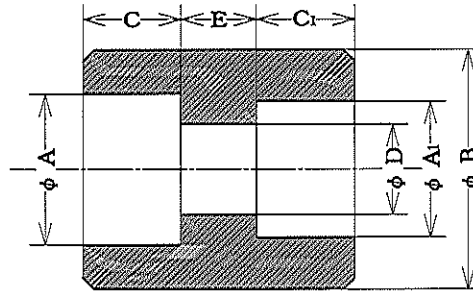

SW RC

UNIT : mm

NOM. SIZE				Sch 80						
(A)		(B)		B	A	A ₁	D	E	C	C ₁
①	②	①	②							
10	8	3/8	1/4	25.0	17.8	14.3	9.4	6.0	10.0	10.0
15	10	1/2	3/8	32.0	22.2	17.8	12.7	10.0	10.0	10.0
20	15	3/4	1/2	38.0	27.7	22.2	16.1	10.0	13.0	13.0
25	15	1	1/2	45.0	34.5	22.2	16.1	10.0	13.0	13.0
25	20	1	3/4	45.0	34.5	27.7	21.4	13.0	13.0	13.0
32	20	1-1/4	3/4	55.0	43.2	27.7	21.4	13.0	13.0	13.0
32	25	1-1/4	1	55.0	43.2	34.5	27.2	13.0	13.0	13.0
40	25	1-1/2	1	65.0	49.1	34.5	27.2	13.0	13.0	13.0
40	32	1-1/2	1-1/4	65.0	49.1	43.2	35.5	13.0	13.0	13.0
50	32	2	1-1/4	75.0	61.1	43.2	35.5	19.0	16.0	16.0
50	40	2	1-1/2	75.0	61.1	49.1	41.2	19.0	16.0	16.0

特記：異径カップリング(レギュレーター)-Eは大径側に等しく，
 Dは小径側，A，C，は各々のサイズに対応する。

REMARK:RED. COUPLING (REDUCER)-E IS EQUAL TO LARGER SIZE,
 D IS EQUAL TO SMALLER SIZE AND A, C, IS CORRESPONDING
 TO EACH IN PRINCIPLE.

ヤマト特殊鋼株式会社
YAMATO SPECIAL STEEL CO., LTD.

Sheet No. JSW-8

平成22年1月5更新